



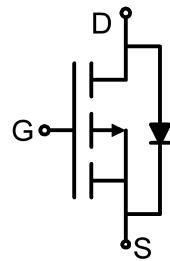

D	-20
D ()	126 (.)
D	-2A



A FE

F
150




D @ c = 25 C	C D C , G @ 10	-2	A
D	D C	-6	
D @ c = 25 C	D	1.25	
D	D -	-20	
G	G - -	12	
G		-55 +150	C

C	,	- -		100 /


@ A=25



(B)D	D - -	-20				G = 0 , D = -250 A
D ()	D - - -		126	155		G = -4.5 , D = -2A
			166	210		G = -2.5 , D = -1A
G ()	G	-0.4		-1		D = G , D = -250 A
D	D - -			-1	A	D = -20 , G = 0
G	G - -			100	A	G = 12
				-100		G = -12
			9.4		C	D = -3A, D = -10 , G = -4.5
	G - -		0.9			
	G - -D (" ")		2.4			
()	-		5			G = -4.5 , DD = -20 , GE = 3 = 10
			13.6			
()	-		11.6			
	F		2.9			
C			171		F	G = 0
C			25			D = -20
C			19			= 100

	C C (B D)			-2	A	FE
	C (B D)			-6	A	-
D	D F			-1.2		= -1A, G = 0





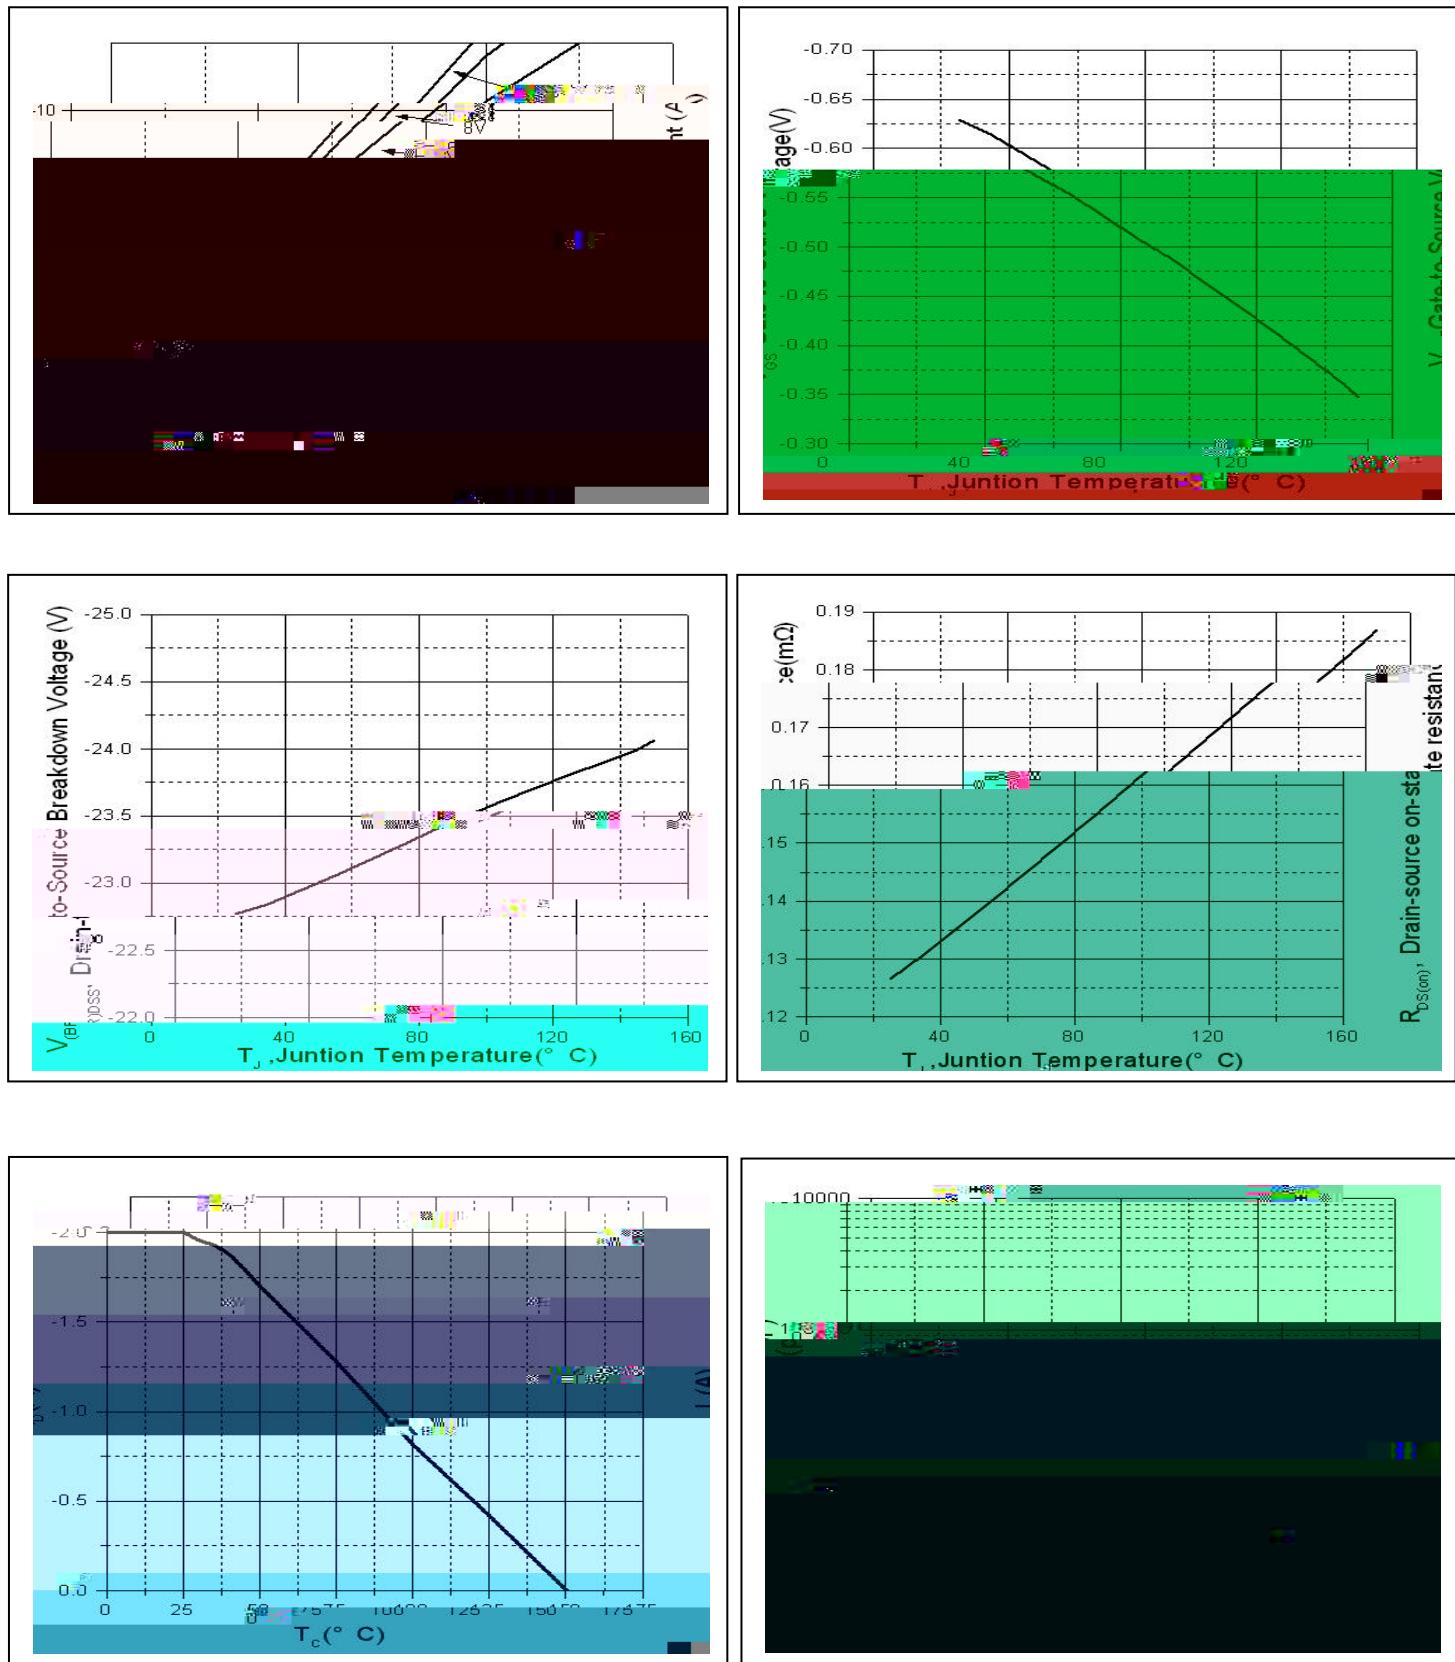

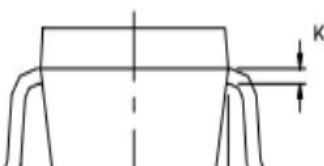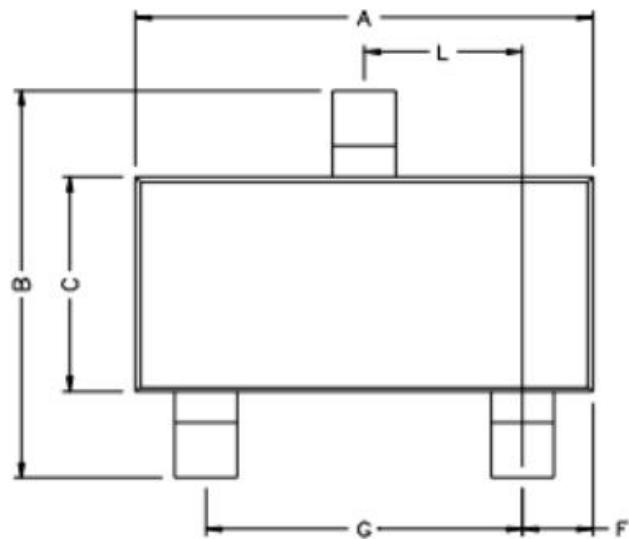

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.80	3.00	G	1.80	2.00
B	2.30	2.50	H	0.90	1.1
C	1.20	1.40	K	0.10	0.20
D	0.30	0.50	J	0.35	0.70
E	0	0.10	L	0.92	0.98
F	0.45	0.55	M	0°	10°



A

C

(, , ,)