


| | |
|---------------|-------|
| V_{CES} | 1250V |
| I_C | 40A |
| $V_{CE(sat)}$ | 1.8V |



Trench FS technology offering
 High speed switching
 Low gate charge and $V_{CE(sat)}$
 High ruggedness, temperature stable behavior
 Maximum junction temperature 175°C



Solar Inverters
 Uninterruptible power supplies
 Motor drives
 Air condition

| | | | |
|-----------------|--|-------------|------------------|
| V_{CES} | Collector-Emitter Voltage | 1250 | V |
| V_{GES} | Gate- Emitter Voltage | ± 30 | V |
| I_C | Collector Current | 80 | A |
| | Collector Current @ $T_C = 100\text{ }^\circ\text{C}$ | 40 | |
| I_{Cpuls} | Pulsed Collector Current t_p limited by T_{jmax} | 160 | |
| - | Turn off safe operating area $V_{CE}=1200V$ $T_J=175^\circ\text{C}$ | 160 | |
| I_F | Diode Continuous Forward Current @ $T_C = 100\text{ }^\circ\text{C}$ | 40 | |
| I_{FM} | Diode Maximum Forward Current | 160 | |
| P_D | Power Dissipation @ $T_C = 25^\circ\text{C}$ | 468 | W |
| | Power Dissipation @ $T_C = 100^\circ\text{C}$ | 234 | W |
| T_J T_{STG} | Operating Junction and Storage Temperature Range | -55 to +175 | $^\circ\text{C}$ |
| T_L | Maximum Temperature for Soldering | 260 | $^\circ\text{C}$ |









| | | | | |
|-----------------|--|---|------|------|
| | | | | |
| R _{JC} | Thermal Resistance, Junction-to-case for IGBT | — | 0.32 | °C/W |
| | Thermal Resistance, Junction-to-case for Diode | — | 0.61 | °C/W |
| R _{JA} | Thermal Resistance, Junction-to-ambient | — | 40 | °C/W |



@T_A=25°C unless otherwise specified


| | | | | | | |
|----------------------|--------------------------------------|------|------|------|----|--|
| | | | | | | |
| V _{(BR)CES} | Collector-Emitter Breakdown Voltage | 1250 | — | — | V | V _{GE} =0V, I _{CE} =1mA |
| V _{CE(sat)} | Collector-Emitter Saturation Voltage | — | 1.8 | 2 | V | I _C =40A, V _{GE} =15V @T _J =25°C |
| | | — | 2.25 | — | | I _C =40A, V _{GE} =15V @T _J =175°C |
| V _{GE(th)} | Gate Threshold Voltage | 4.5 | — | 6 | V | I _C =1.9mA, V _{CE} =V _{GE} |
| I _{CES} | Collector-Emitter Leakage Current | — | — | 200 | μA | V _{GE} =0V, V _{CE} =1200V |
| I _{GES} | Gate to Emitter Reverse Leakage | — | — | 200 | nA | V _{GE} =25V, V _{CE} =0V |
| | | — | — | -200 | | V _{GE} =-25V, V _{CE} =0V |
| C _{ies} | Input capacitance | — | 4700 | — | pF | V _{GS} = 0V |
| C _{oes} | Output capacitance | — | 106 | — | | V _{DS} = 50V |
| C _{res} | Reverse transfer capacitance | — | 66 | — | | f = 1MHz |
| t _{d(on)} | Turn-on delay time | — | 40 | — | ns | V _{CC} =600V, V _{GE} =0.0/15.0V, R _G =10.0 , L =70nH, C =67pF |
| t _r | Rise time | — | 23 | — | | |
| t _{d(off)} | Turn-Off delay time | — | 350 | — | | |
| t _f | Fall time | — | 50 | — | | |
| E _{on} | Turn-On Switching Loss | — | 2.2 | — | mJ | V _{CC} =600V, V _{GE} =0.0/15.0V, R _G =10.0 , L =70nH, C =67pF |
| E _{off} | Turn-Off Switching Loss | — | 1.8 | — | | |
| E _{ts} | Total Switching Loss | — | 4 | — | | |
| Q _g | Total Gate Charge | — | 238 | — | nC | V _{CC} =480V, I _C =40A, V _{GE} =15V |
| Q _{ge} | Gate to Emitter Charge | — | 40 | — | | |
| Q _{gc} | Gate to Collector Charge | — | 135 | — | | |


@T_A=25°C unless otherwise specified


| | | | | | | |
|------------------|-------------------------------------|---|-----|---|----|--|
| | | | | | | |
| V _{FM} | Diode Forward Voltage | — | 2.3 | 3 | V | I _F =40A, V _{GE} =0V |
| t _{rr} | Reverse Recovery Time | — | 320 | — | ns | T _J = 25°C, I _F =40A, di/dt = 700A/μs |
| Q _{rr} | Reverse Recovery Charge | — | 2.6 | — | μC | |
| I _{RRM} | Diode Peak Reverse Recovery Current | — | 19 | — | A | |

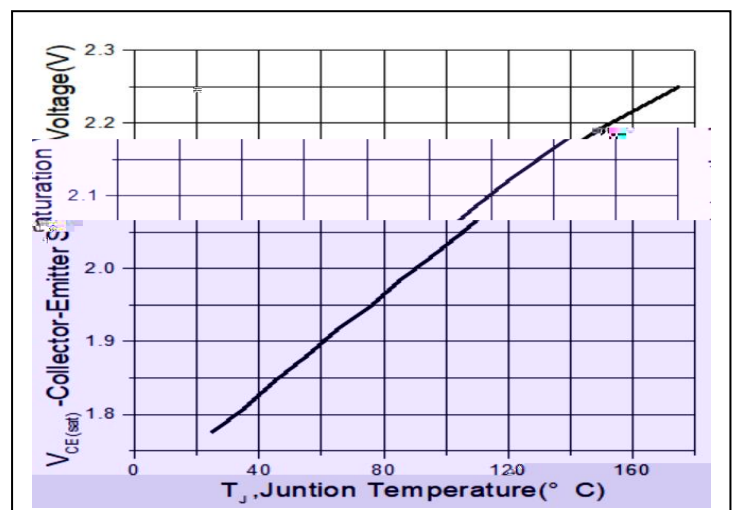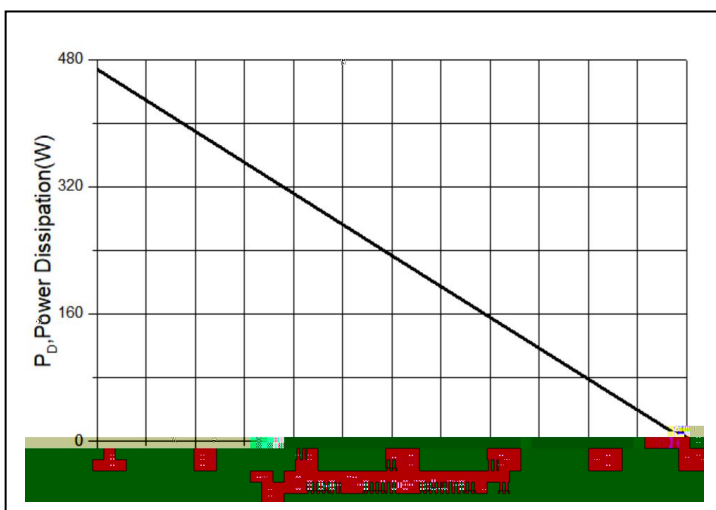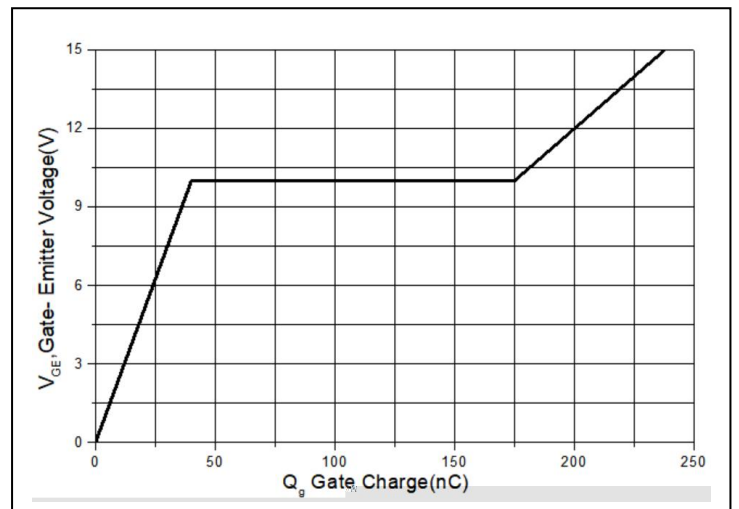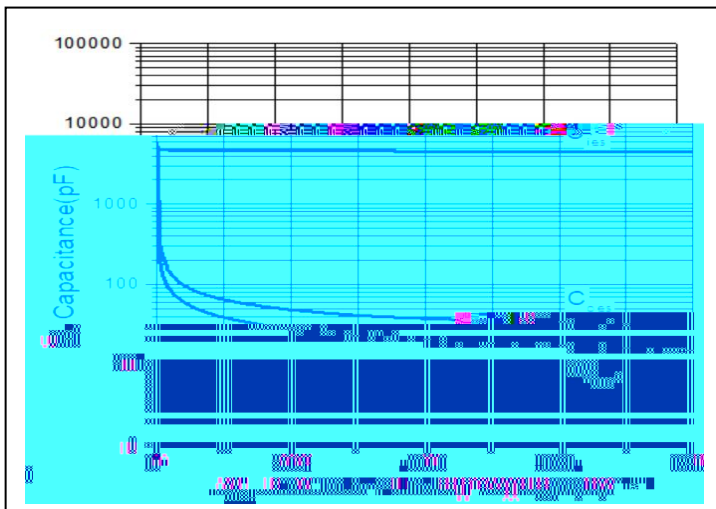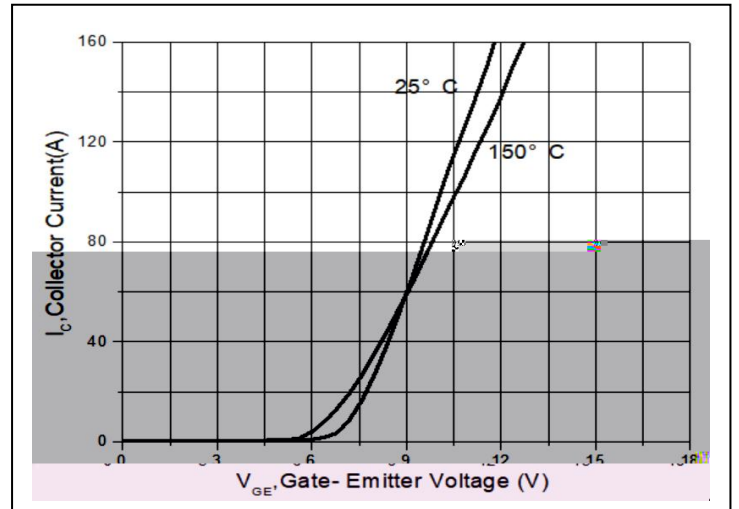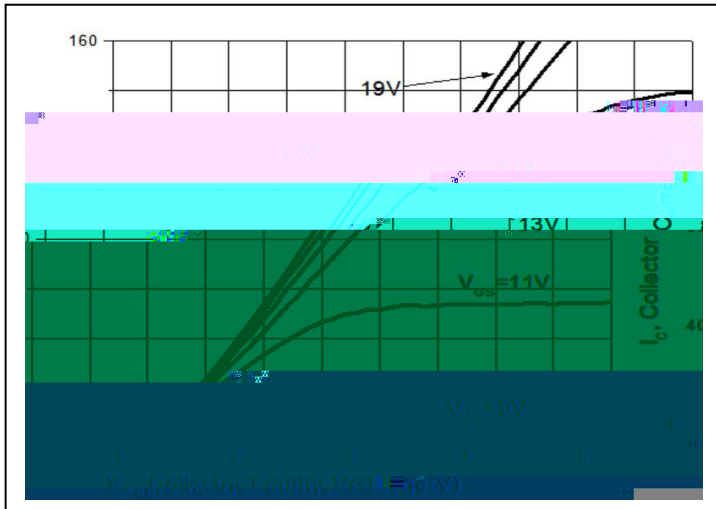

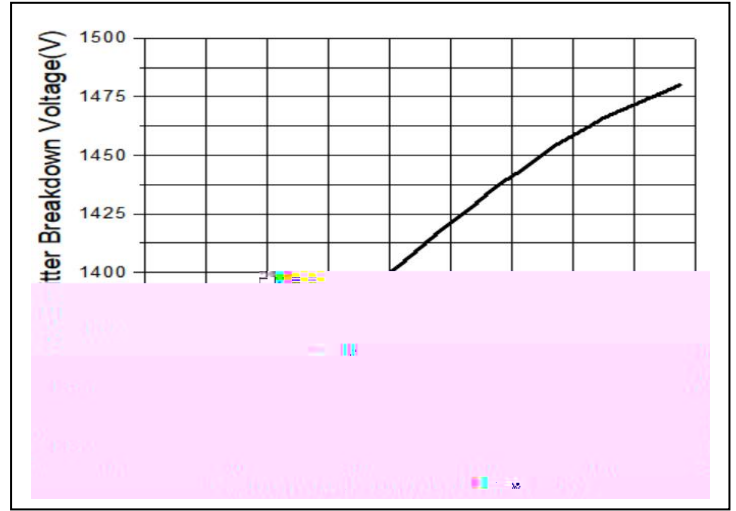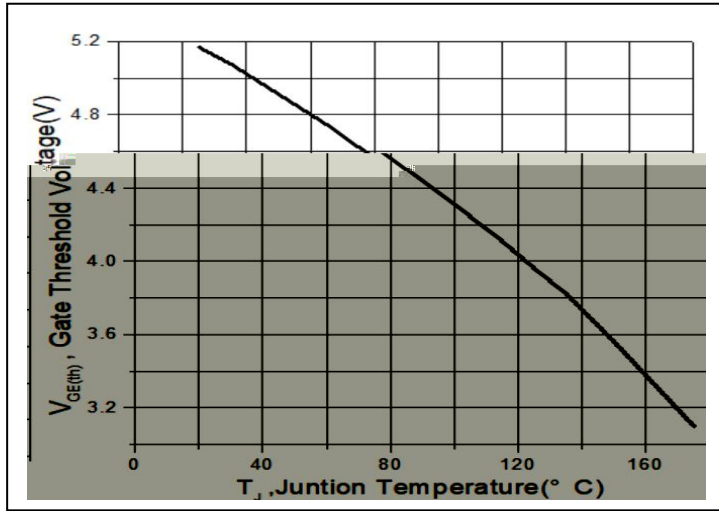

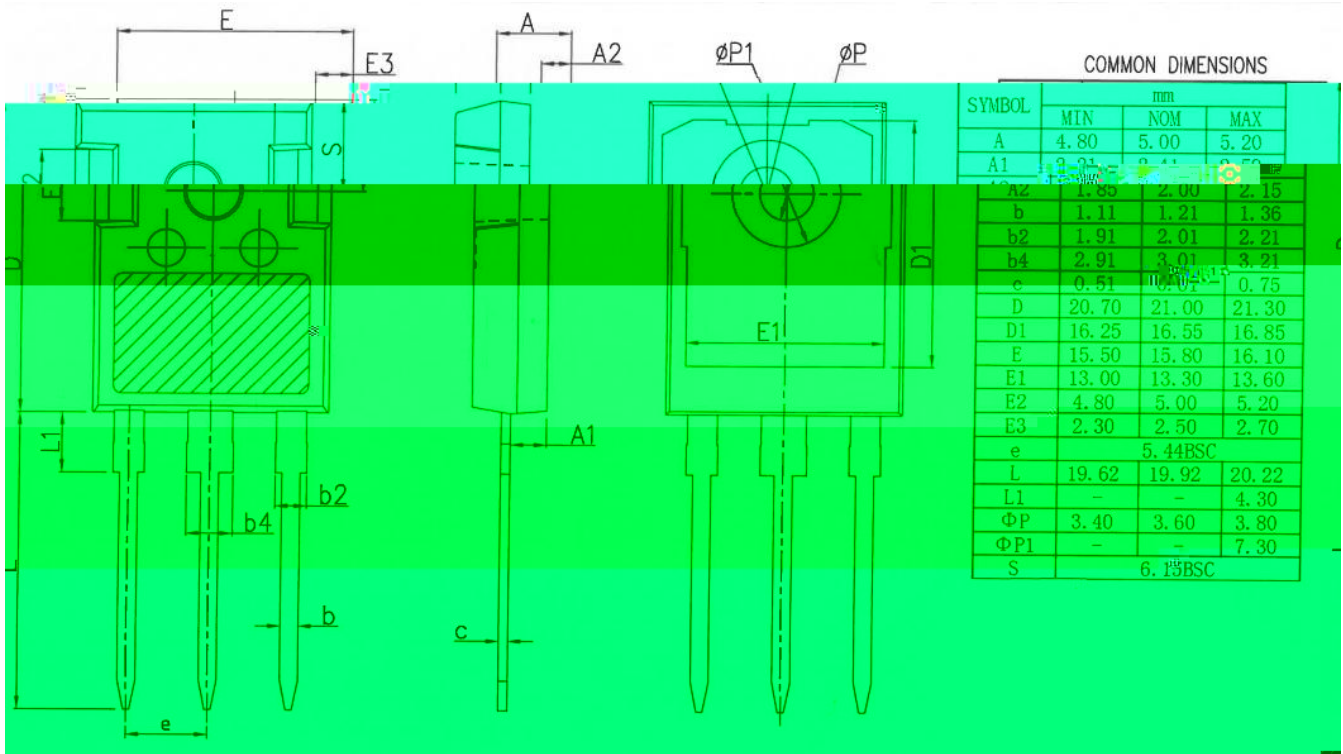

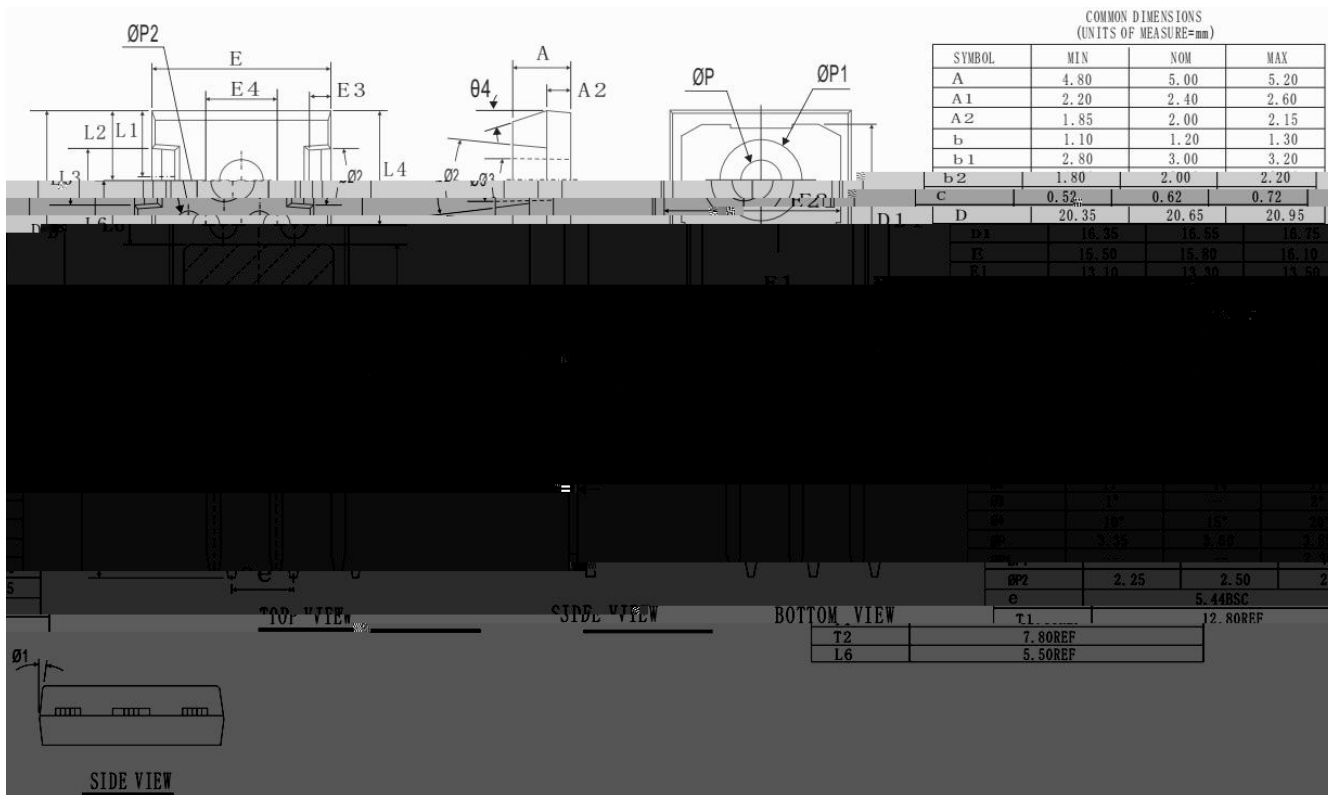

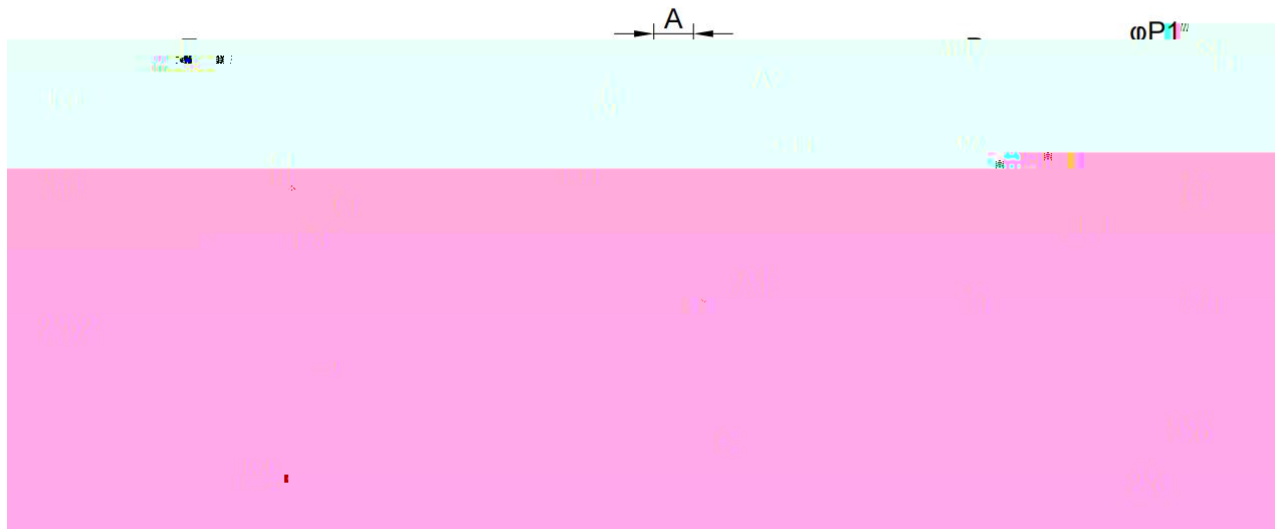

| TO247-3L | | | | | | | | |
|----------|-------|-------|-------|----|-------|-------|-------|--|
| | Min | Typ | Max | | Min | Typ | Max | |
| A | 4.7 | 5.00 | 5.20 | E1 | 13.2 | 13.5 | 13.8 | |
| A1 | 2.30 | 2.40 | 2.50 | E2 | 4.90 | 5.00 | 5.10 | |
| A2 | 1.90 | 2.00 | 2.10 | E3 | 1.50 | 1.60 | 1.70 | |
| b | 1.10 | 1.20 | 1.30 | e | 5.34 | 5.44 | 5.54 | |
| b2 | 1.80 | 2.00 | 2.20 | L | 19.80 | 20.00 | 20.32 | |
| b4 | 2.80 | 3.00 | 3.20 | L1 | | 4.17 | 4.50 | |
| C | 0.5 | 0.6 | 0.7 | P | 3.50 | 3.60 | 3.70 | |
| D | 20.8 | 20.95 | 21.1 | P1 | 7.00 | 7.10 | 7.40 | |
| D1 | 16.25 | 16.55 | 16.85 | R | 6.00 | 6.15 | 6.30 | |
| D2 | 0.95 | 1.17 | 1.35 | | | | | |
| E | 15.48 | 15.88 | 16.28 | | | | | |

